



### KBC100

#### Ø120mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 120
Cutter Depth	mm	75
Twist Drill	mm	2.5 – 38
Screw		M 42
Spindle Holder		MT4
No load Speed	rpm	82/180/245/535
Power	W	1800
Magnetic Adhesion	N	24000
Core Size	mm	360 x 110 x 60
Stroke	mm	210
Weight	Kg	30

### KRD35

#### Ø35mm Rail Drill

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 35
Cutter Depth	mm	50
Twist Drill	mm	1.5 – 13
Spindle Holder	mm	19
No load Speed	rpm	595
Power	W	1200
Stroke	mm	190
Weight	Kg	12



### KBC1280

#### Ø128mm Pipe drill


Voltage	V	230
Frequency	Hz	50
Drilling range	mm	128
Rated input power	W	2180
No-load speed	rpm	0-380
Pipe cutting size	mm	80-300

### KMCL

#### Magnetic cleaner



# Broach Cutter Range

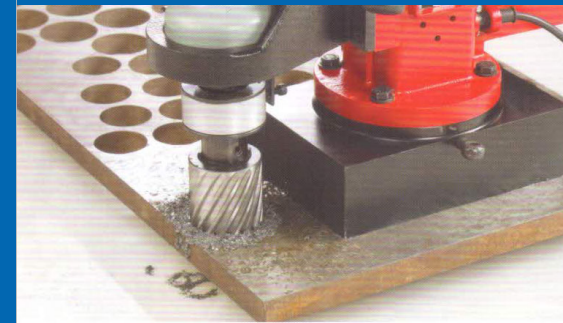

### KBC28

#### Ø28mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 32
Cutter Depth	mm	35
Spindle Holder	mm	19
No load Speed	rpm	550
Power	W	1000
Magnetic Adhesion	N	13000
Core Size	mm	160x80x50
Stroke	mm	45
Weight	Kg	10.2



### KBC35

#### Ø35mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12-35
Cutter Depth	mm	150
Twist Drill	mm	1.5-13
Spindle Holder	mm	19
No Load Speed	rpm	600
Power	W	1150
Magnetic Adhesion	N	12000
Stroke	mm	310
Weight	kg	9.2kgs



### KBC38

#### Ø38mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 38
Cutter Depth	mm	50
Twist Drill	mm	1.5 – 13
Spindle Holder	mm	19
No load Speed	rpm	595
Power	W	1200
Magnetic Adhesion	N	13000
Core Size	mm	160 x 80 x 50
Stroke	mm	165
Weight	Kg	13.5



### KBC38E

#### Ø38mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	38
Cutter Depth	mm	38
Spindle Holder	mm	19
No load Speed	rpm	0-650
Power	W	1620
Magnetic Adhesion	N	14500
Core Size	mm	160x80x50
Max Travel	mm	140
Weight	Kg	12.5



**Variable Speed**

### KBRC40

#### Ø40mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12-40
Cutter Depth	mm	50
Twist Drill	mm	1.5-16
Spindle Holder	mm	19mm
No Load Speed	rpm	650
Power	W	1000
Magnetic Adhesion	N	13000
Stroke	mm	300
Weight	kg	17



### KBRC42

#### Ø42mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Capacity to Fit core Drill	mm	42Max
Drill Capacity	mm	23Max
No Load Speed	rpm	400
Power	W	1100
Magnetic Adhesion	N	11000
Stroke	mm	340
Weight	kg	39



### KBC45

#### Ø45mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 45
Cutter Depth	mm	50
Twist Drill	mm	2.5 – 16
Spindle Holder	mm	19
No load Speed	rpm	260 / 560
Power	W	1200
Magnetic Adhesion	N	13000
Core Size	mm	160 x 80 x 50
Stroke	mm	165
Weight	Kg	13.5



### KBC50

#### Ø50mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Depth of Cut	mm	60mm
Broach Capacity	mm	50
Drilling Capacity	mm	16
No Load Speed	rpm	450
Power	W	1100
Stroke	mm	300
Weight	kg	30



### KBC60

#### Ø60mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 60
Cutter Depth	50mm	50
Twist Drill	mm	2.5 – 16
Screw		M18
Spindle Holder	mm	19
No load Speed	rpm	260 / 460
Power	W	1800
Magnetic Adhesion	N	18000
Core Size	mm	220 x 110 x 60
Stroke	mm	210
Weight	Kg	21



### KMSBRC

#### Ø62mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Capacity to Fit core Drill	mm	62Max
Drill Capacity(MT3)	mm	32Max
No Load Speed	rpm	270
Power	W	1100
Magnetic Adhesion	N	15000
Stroke	mm	315
Weight	kgs	39



### KBC75

#### Ø75mm Broach Cutter

Voltage	V	230
Frequency	Hz	50
Cutter Capacity	mm	12 to 75
Cutter Depth	mm	75
Twist Drill	mm	2.5 – 16
Screw		M30
Spindle Holder	MT3	
No load Speed	rpm	260 / 460
Power	W	1800
Magnetic Adhesion	N	18000
Core Size	mm	220 x 110 x 60
Stroke	mm	210
Weight	Kg	22